


RFT Rafena Rubens Typ FE855C1

Schaltplan:

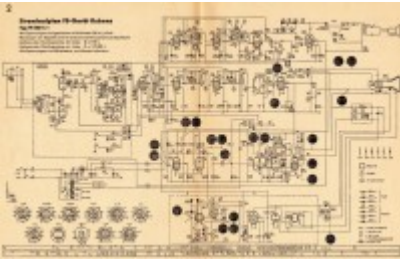

Kondensatoren:

Keramik

500V= (und alle anderen nicht unterscheidbaren Spannungsfestigkeiten wie 160V=, 350V=)

| Pos   | Wert    |
|-------|---------|
| C301a | 500 pF  |
| C301b | 500 pF  |
| C301c | 500 pF  |
| C310  | 20 pF   |
| C305  | 500 pF  |
| C316  | 20 pF   |
| C34   | 2000 pF |
| C313  | 1200 pF |
| C312  | 10 pF   |
| C309  | 4000 pF |
| C28   | 4000 pF |
| C29   | 4000 pF |
| C31   | 120 pF  |
| C42   | 120 pF  |
| C63   | 4000 pF |
| C67   | 100 pF  |
| C64   | 100 pF  |
| C65   | 4000 pF |
| C66   | 4000 pF |
| C68   | 500 pF  |
| C76   | 500 pF  |
| C60   | 30 pF   |
| C61   | 30 pF   |
| C59   | 35 pF   |
| C58   | 30 pF   |
| C57   | 35 pF   |
| C89   | 100 pF  |
| C94   | 75 pF   |
| C111  | 300 pF  |
| C114  | 300 pF  |

250V~

| Pos | Wert     |
|-----|----------|
| C26 | 2000 pF  |
| C24 | 5000 pF  |
| C62 | 5000 pF  |
| C56 | 5000 pF  |
| C46 | 0,2 µF   |
| C47 | 0,025 µF |
| C37 | 4000 pF  |
| C38 | pF       |
| C43 | 4000 pF  |

500V= (und alle anderen nicht unterscheidbaren Spannungsfestigkeiten wie 500V~)

| Pos  | Wert     |
|------|----------|
| C74  | 1000 pF  |
| C77  | 1000 pF  |
| C80  | 10000 pF |
| C90  | 2000 pF  |
| C91  | 2000 pF  |
| C119 | 0,1 µF   |
| C125 | 0,1 µF   |
| C106 | 1300 pF  |
| C107 | 0,05 µF  |
| C112 | 10000 pF |
| C113 | 2000 pF  |
| C116 | 0,05 µF  |
| C302 | 2 pF     |
| Pos  | Wert     |
| C314 | 60 pF    |
| C73  | 0,05 µF  |
| C50  | 5000 pF  |
| C88  | 0,1 µF   |
| C93  | 0,2 µF   |
| C85  | 0,05 µF  |
| C86  | 0,05 µF  |
| C87  | 0,05 µF  |
| C96  | 0,1 µF   |
| C99  | 0,1 µF   |
| C101 | 0,1 µF   |
| C100 | 3000 pF  |
| C136 | 10000 pF |
| C79  | 5000 pF  |
| C118 | 10000 pF |

| Pos   | Wert          |
|-------|---------------|
| C108  | 0,025 $\mu$ F |
| C109  | 0,5 $\mu$ F   |
| C110  | 0,05 $\mu$ F  |
| Pos   | Wert          |
| C134  | 5000 pF       |
| C51   | 15 pF         |
| C78   | 5000 pF       |
| C318  | 3000 pF       |
| C319  | 3000 pF       |
| C320  | 3000 pF       |
| C323  | 3000 pF       |
| C321  | 80 pF         |
| C303b | 5 pF          |
| C304  | 3000 pF       |
| C98   | 50 $\mu$ F    |
| C115  | 0,5 $\mu$ F   |
| Pos   | Wert          |
| C45   | 100 $\mu$ F   |
| C44   | 250 $\mu$ F   |
| C81   | 250 $\mu$ F   |
| C82   | 16 $\mu$ F    |
| C22   | 50 $\mu$ F    |
| C48   | 50 $\mu$ F    |
| C49   | 10 $\mu$ F    |
| C128  | 100 $\mu$ F   |
| C132  | 50 $\mu$ F    |
| C97   | 16 $\mu$ F    |
| C130  | 100 $\mu$ F   |

From:

<https://loetlabor-jena.de/> - Lötlabor Jena

Permanent link:

[https://loetlabor-jena.de/doku.php?id=projekte:rft\\_rafena\\_rubens\\_restoration&rev=1389772894](https://loetlabor-jena.de/doku.php?id=projekte:rft_rafena_rubens_restoration&rev=1389772894)

Last update: 2014/01/15 08:01

